




M.A.P. system

Air Sealing & Flashing Tape

by Maxell



The primary and differentiating feature of Maxell Airtight Products(M.A.P.) and flashing materials is "Quick and easy to install".

Air Sealing and Flashing Tape is a single-adhesive tape that makes sheathing joints airtight and waterproof.

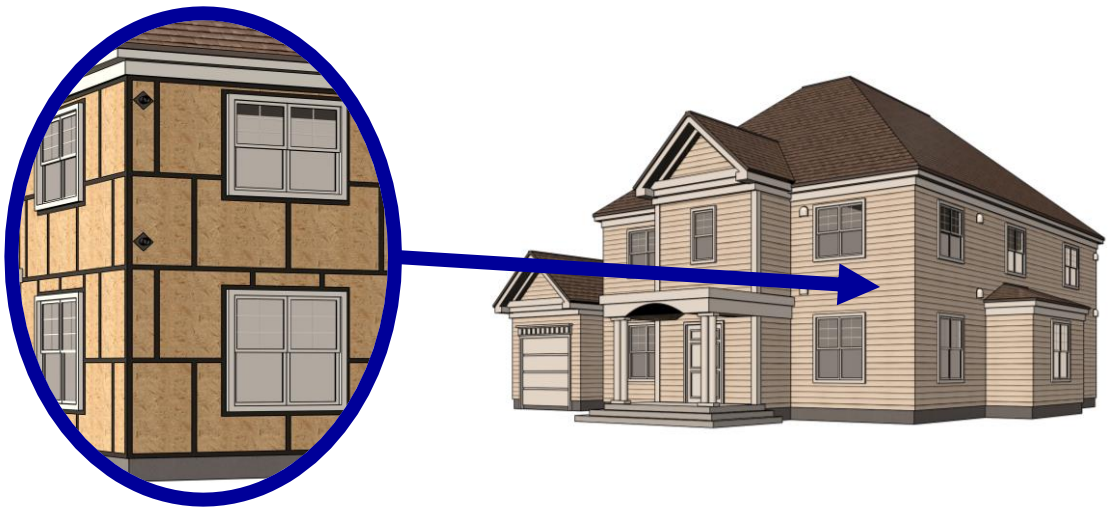


Advantages

- ◆ It is easily rolled back and cut by hand
- ◆ No excess waste is produced on site

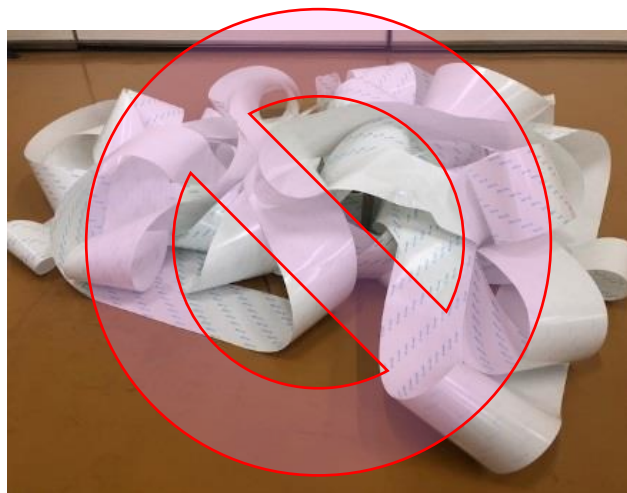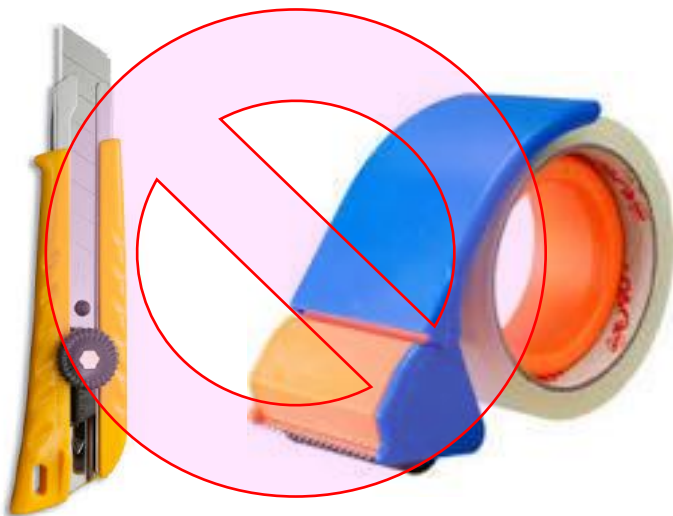

Structure

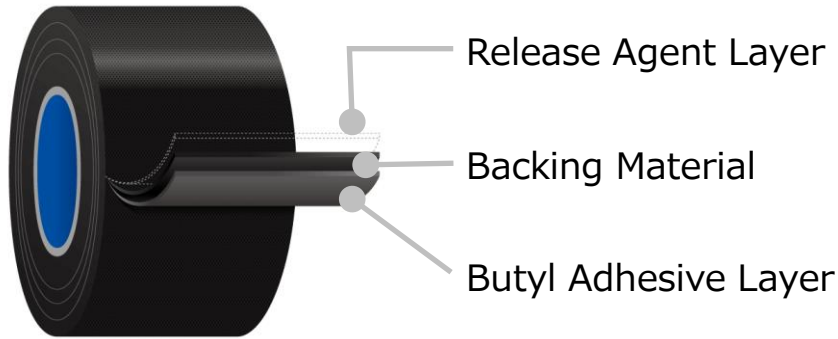

Thickness : 14mil(0.35mm)

**Complies with
AAMA711-13**


Properties

Properties		Air Sealing & Flashing Tape
Adhesion	Plywood	2.7 lbf/in
	OSB	2.3 lbf/in
	Dens Glass Gold [®]	5.0 lbf/in
Application temperature ^{※1}		32F~(0C~)
Service temperature ^{※2}		14~176F(-20~80C)


※1 When using at 32F or less, warm Air Sealing & Flashing Tape with a dryer before using.

※2 Air Sealing & Flashing Tape should be installed in conditions above 32F(0C).

Application Example

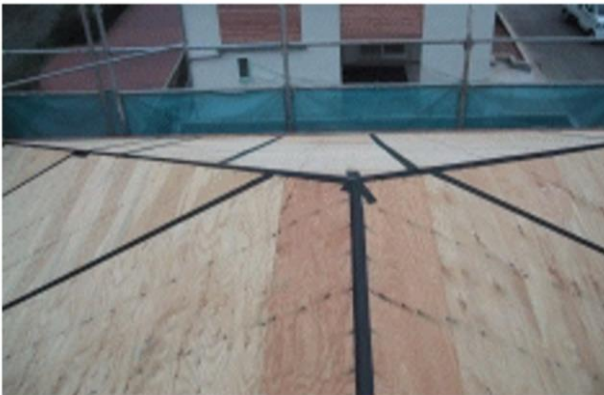

① Sheathing Joint

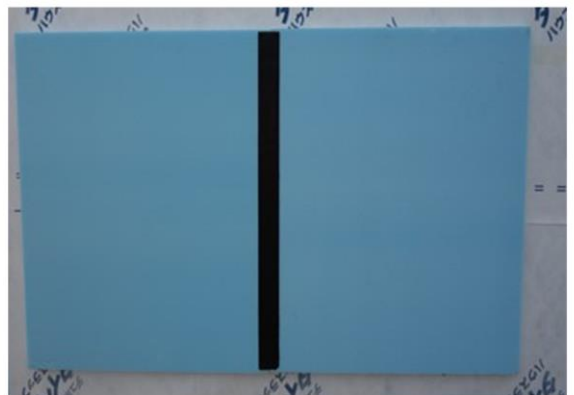

② Insulation Joint

Distributor : Interra USA, Inc. <http://www.interra-usa.com/>
 add: 900 SW 16th Street Suite 125, Renton, WA, 98057
 E-mail:info@interra-usa.com Tel:1-425-277-7850



Manufacturer : Maxell, Ltd. <https://biz.maxell.com/en/>

Made in JAPAN

For more details,
please visit our Website