

maxell



M.A.P. system



Sill & Wall Sealer

The primary and differentiating feature of **Maxell Airtight Products(M.A.P.)** and airtight materials is **"Quick and easy to install"**.

Installed in an L-shaped configuration, Sill & Wall Sealer combines innovative installation with high-performance EPDM foam to create a tighter air seal around the foundation.




How to use

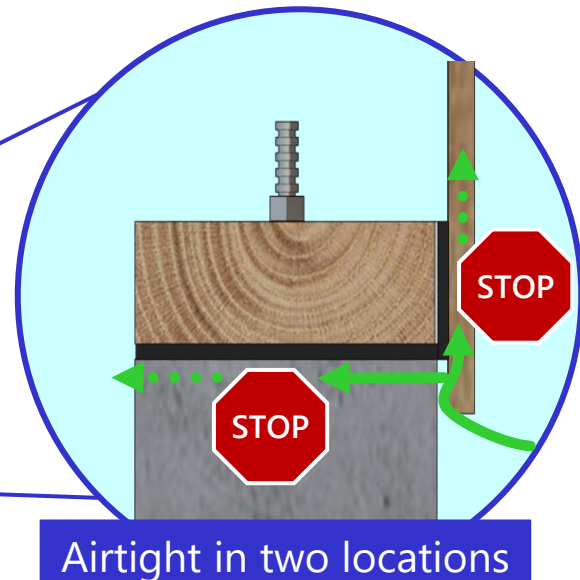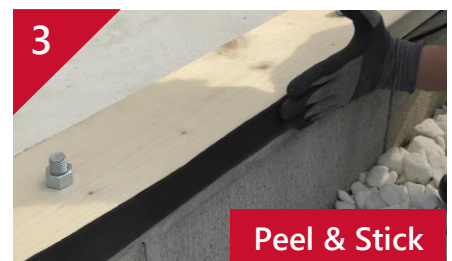

One Product. Two Airtight Seals.

Structure

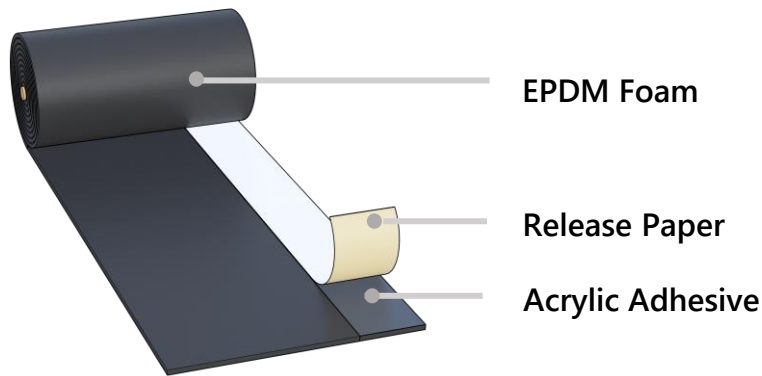


Thickness : 161mil (4.08mm)

Part No.	Applied Framing	Size	Rolls/carton
MAP-F40	2 x 4	5-3/4" x 33'	4
MAP-F60	2 x 6	7-1/4" x 33'	4
MAP-F80	2 x 8	9" x 33'	4

Feature

This one is all you need !


Airtightness can be achieved without using caulking agents or adhesive tape

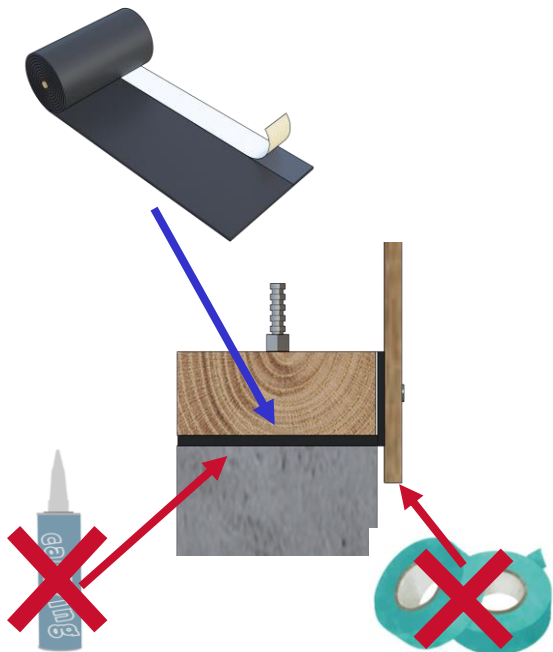

Airflow volume is about 1/50th that of None

Sill & Wall Sealer can be used to improve airtightness.

CFM50(ft3/min) 

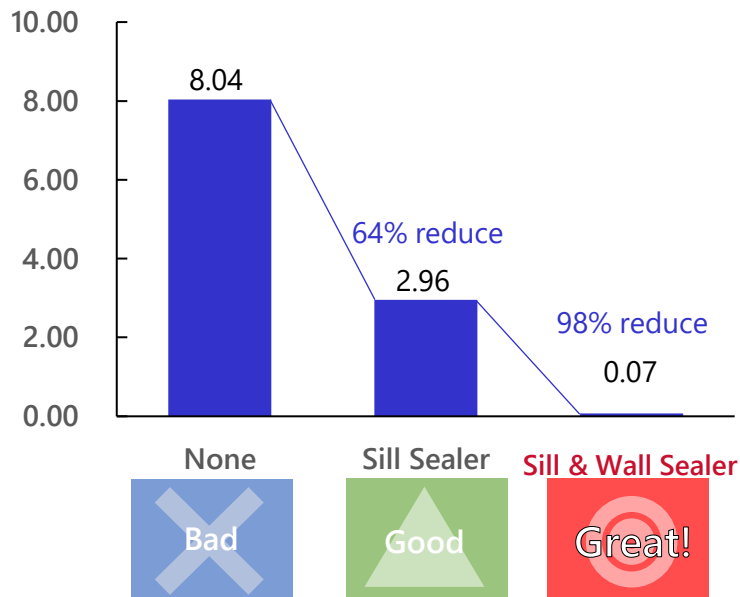

* Testing organization : Japan Testing Center for Construction Materials
Size of test equipment : 12ft

Distributor : Interra USA, Inc. <http://www.interra-usa.com/>
Add: 900 SW 16th Street Suite 315, Renton, WA, 98057
E-mail: info@interrausa.com Tel: 425-277-7850

Manufacturer : Maxell, Ltd. <https://biz.maxell.com/en/>
Made in JAPAN



For more details,
please visit our Website

maxell